

⊕ Feature

- Low profile very effective in space-conscious applications.
- Low resistance and high energy storage.

⊕ Applications

VTR, OA equipment, digital camera, LCD TV, notebook PC, portable communication equipments, DC/DC converters, power supply

⊕ Product Identification :

□□□

□□□□

□□

-

□□□

□

1

2

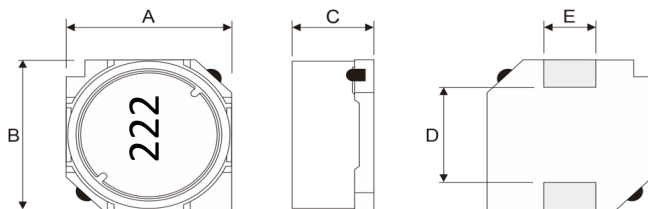

3

4

5

Series name	Dimensions(LxWxH)		Internal code
SPD	073	7.3*7.3*3.5mm	S=Standard
	129	12*12*10mm	

Inductance		Tolerance	
1R0	1 μH	M	20%
101	100 μH	N	30%

⊕ Shapes And Dimensions

⊕ Recommended PCB Pattern


Part No.	Dimensions(mm)								
	A	B	C	D	E		H	I	J
SPD6028	6.0±0.30	6.0±0.30	2.8±0.30	3.0 Typ	2.0 Typ		2.2 Ref	2.0 Ref	3.0 Ref
SPD7032	7.0±0.30	7.0±0.30	3.2±0.30	4.0 Typ	2.0 Typ		2.2 Ref	2.0 Ref	4.0 Ref
SPD7045	7.0±0.30	7.0±0.30	4.5±0.30	4.0 Typ	2.0 Typ		2.2 Ref	2.0 Ref	4.0 Ref
SPD7055	7.0±0.30	7.0±0.30	5.5±0.30	4.0 Typ	2.0 Typ		2.2 Ref	2.0 Ref	4.0 Ref
SPD10145	10.1±0.30	10.1±0.30	4.5±0.30	6.0 Typ	3.0 Typ		3.2 Ref	2.5 Ref	6.0 Ref
SPD10165	10.1±0.30	10.1±0.30	6.5±0.35	6.0 Typ	3.0 Typ		3.2 Ref	2.5 Ref	5.6 Ref
SPD12575	12.5±0.30	12.5±0.30	7.5±0.35	8.0 Typ	3.0 Typ		3.2 Ref	2.5 Ref	8.0 Ref

⊕ Equivalent Circuit Schematic :

⊕ Material List :

No.	Location	Material
1	Core	Ferrite Ni-Zn core
2	Wire	Grade1,P180
3	Base	SHS-DR9.8
4	Epoxy	G500HF
5	Solder	Sn99.3 Cu0.7
6	Ink	Black

1. Operating temperature -40°C ~ +125°C

2. Storage conditions -40°C ~ +125°C

⊕ Electrical Characteristics :

Part No.	Inductance (μ H)	Isat (A) Max	SASPD25031401 Max	Test Frequency
SPD6028S-4R7M	4.7 $\pm$ 20%	2.70	65	100KHz/0.25V
SPD6028S-6R8M	6.8 $\pm$ 20%	1.00	60	100KHz/0.25V
SPD6028S-100M	10 $\pm$ 20%	0.80	98	100KHz/0.25V
SPD6028S-101M	100 $\pm$ 20%	0.42	0.71	100KHz/0.25V
SPD6028S-121M	120 $\pm$ 20%	0.37	800	100KHz/0.25V
SPD6028S-470M	47 $\pm$ 20%	0.70	0.38	1KHz/0.25V

⊕ Electrical Characteristics :

Part No.	Inductance (μ H)	Isat (A) Max	DCR (m Ω) Max	Test Frequency
SPD7032S-1R0N	1 $\pm$ 30%	5.50	19	1KHz/0.25V
SPD7032S-3R3N	3.3 $\pm$ 30%	3.55	27	100KHz/0.25V
SPD7032S-102M	1 $\pm$ 20%	0.13	7.125	1KHz/0.25V
SPD7032S-220M	2025/3/14 $\pm$ 20%	0.96	150	100KHz/0.25V
SPD7032S-470M	47 $\pm$ 20%	0.67	280	1KHz/0.5V

⊕ Electrical Characteristics :

Part No.	Inductance (μ H)	Isat (A) Max	DCR (m Ω) Max	Test Frequency
SPD7045S-3R3M	3.3 $\pm$ 20%	2.70	35	1KHz/0.25V
SPD7045S-100M	10 $\pm$ 20%	1.20	0.065	1KHz/0.5V
SPD7045S-101M	100 $\pm$ 20%	0.50	360	1KHz/0.5V
SPD7045S-102M	1000 $\pm$ 20%	0.13	3.8	1KHz/0.5V
SPD7045S-221M	220 $\pm$ 20%	0.30	0.868	1KHz/0.5V
SPD7045S-271M	270 $\pm$ 20%	0.28	840	1KHz/0.3V
SPD7045S-680M	68 $\pm$ 20%	0.63	280	1KHz/0.25V
SPD7045S-681M	680 $\pm$ 20%	0.20	2.3	1KHz/0.25V

⊕ Electrical Characteristics :

Part No.	Inductance (μ H)	Isat (A) Max	DCR (m Ω) Max	Test Frequency
SPD7055ET-150M	15.0 $\pm$ 20%	2.10	60.98	100KHz/1V
SPD7055ET-220M	22.0 $\pm$ 20%	1.70	88	100KHz/0.25V

⊕ Electrical Characteristics :

Part No.	Inductance (μ H)	Isat (A) Max	DCR (m Ω) Max	Test Frequency
SPD10145S-3R3M	3.3 $\pm$ 20%	5.10	19.2	100KHz/0.5V
SPD10145S-4R7M	4.7 $\pm$ 20%	3.70	24	1KHz/0.5V
SPD10145S-100M	10.0 $\pm$ 20%	3.00	43.6	1KHz/0.25V
SPD10145S-101M	100.0 $\pm$ 20%	1.00	240	100KHz/0.25V
SPD10145S-150M	15.0 $\pm$ 20%	2.40	56.6	100KHz/1V
SPD10145S-151M	150.0 $\pm$ 20%	0.70	0.45	1KHz/0.25V
SPD10145S-152M	1500.0 $\pm$ 20%	0.27	4000	1KHz/0.25V
SPD10145S-221M	220.0 $\pm$ 20%	0.78	582	100KHz/0.1V
SPD10145S-272M	2700.0 $\pm$ 20%	0.20	8	1KHz/0.25V
SPD10145S-331M	330.0 $\pm$ 20%	0.54	1050	1KHz/1V

⊕ Electrical Characteristics :

Part No.	Inductance (μ H)	Isat (A) Max	DCR (m Ω) Max	Test Frequency
SPD10165S-3R3N	3.3 $\pm$ 30%	7.80	21	100KHz/0.25V

⊕ Electrical Characteristics :

Part No.	Inductance (μ H)	Isat (A) Max	DCR (m Ω) Max	Test Frequency
SPD12555E-330M	33.0 $\pm$ 30%	1.90	51.5	1KHz/0.5V
SPD12555S-6R0N	6.0 $\pm$ 30%	3.60	16.4	1KHz/1V
SPD12555S-100N	10.0 $\pm$ 30%	3.40	21.5	1KHz/1V
SPD12555S-100M	10.0 $\pm$ 20%	6.20	21.5	1KHz/1V
SPD12555S-221M	220.0 $\pm$ 20%	0.70	0.32	1KHz/0.25V
SPD12555S-680M	68.0 $\pm$ 20%	1.30	83.2	1KHz/1V



⊕ Electrical Characteristics :

Part No.	Inductance (μ H)	Isat (A) Max	DCR (m Ω) Max	Test Frequency
SPD12565S-100M	10.0 $\pm$ 20%	5.00	24.2	1KHz/0.1V
SPD12565S-150M	15.0 $\pm$ 20%	4.20	28.44	1KHz/0.3V
SPD12565S-220M	22.0 $\pm$ 20%	3.50	37.92	1KHz/0.3V
SPD12565S-220M	47.0 $\pm$ 20%	2.40	57.8	1KHz/0.5V

⊕ Electrical Characteristics :

Part No.	Inductance (μ H)	Isat (A) Max	DCR (m Ω) Max	Test Frequency
SPD12575E-330M	33.0 $\pm$ 20%	3.20	39.5	1KHz/0.25V
SPD12575S-100M	10.0 $\pm$ 20%	5.50	15.6	1KHz/1V
SPD12575S-100M	15.0 $\pm$ 20%	4.70	30	1KHz/1V
SPD12575S-470M	47.0 $\pm$ 20%	3.00	0.12	1KHz/0.25V
SPD12575S-471M	470.0 $\pm$ 20%	1.00	0.78	1KHz/0.25V

⊕ General Characteristics

項目 Item	Conditions	SASPD25031401
温度特性 Temperature drift	在温度-40 ~ + 125°C之间测试。 To be measured in the range of -40°C to 125°C.	Inductance temperature coefficient 2000 ppm/°C or less
保存温度范围 Storage Temperature	在包装的状态下。 With taping.	- 40°C ~ + 125°C
使用温度范围 Operating Temperature	包括制品的发热温度。 Including self temperature rise.	- 40°C ~ + 125°C
弯曲测试 Bending test	试件焊接在基板上，按箭头方向以大约0.5mm/秒的速度加压，直到基板变形幅度到3mm 保持30 秒。 Apply pressure gradually in the direction of the arrow at a rate of about 0.5mm/s until bent depth reaches 3mm and hold for 30±5s. 	Change from an initial value L : within±10%
固着强度 Adhesion strength	按箭头方向用R0.5的加压棒在试件中施加一定的静力并保持60±5秒。 A static load using a R0.5 pressing tool shall be applied the arrow and to the body of the specimen in the direction of the arrow and shall be hold for 60±5s. Measure after removing pressure. 	Change from an initial value L : within±10%

#####

耐振性 Vibration	振动频率10 ~ 55 ~ 10Hz, 振幅1.5mm, 分X,Y,Z 方向各振动1 小时 (共3 小时) 。 The specimen shall be subjected to a vibration of 1.5mm amplitude, sweep frequency 10~55Hz (10Hz to 55Hz to 10Hz in a period of one minute) for 1 h in each of 3(X,Y,Z) axes.	Change from an initial value L : within±10%
耐冲击性 Mechanical shock	利用橡胶块式落下冲击试验机，分别在3 个互相垂直的方向以981m/S² 的冲击加速度落下。 Peak acceleration: 981 m/S² Duration of pulse: 6ms 3 times in each of 3(X,Y,Z)axes. The specimen must be fixed on test board. Three successive shock shall be applied in the perpendicular direction of each surface of the specimen.	Change from an initial value L : within±10%
自然落下试验 Free fall test	试件安装在基板上，并固定在重500 克的盒中，由1 米高自由落体，3 个互相垂直的方向各3 次。 The specimen must be fixed on test board. It must be equipped with instruments of which weight is 500g. Then it shall be fallen freely from 1m height to rigid wood 3 times in each of three axes.	Change from an initial value L : within±10%
焊锡附着性 Solder ability	试验品的电极深布松香后，在5 ~ 10 秒内焊锡，焊锡槽温度245±5℃，时间：3±0.5 秒。 Terminals shall be immersed for 5 to 10 seconds in flux at room temperature. Dip sample into solder bath containing molten solder at 245±5℃ for 3±0.5 seconds.	90%以上的面积要被覆盖。 New solder shall cover 90% minimum of the surface immersed.
耐电压 Dielectric strength	在电极与磁材之间加入直流电压100V 通电时间1 分钟。 100V DC shall be applied for 60s between the terminal and the core.	没有损害。 Without damage.

焊锡耐热性 Resistance to soldering heat	试验方法Test method 热风炉焊接Reflow soldering method 预热Preheat 150~180°C 90±30s 峰值温度Peak temp 250(+ 5,-0)°C (230°Cmin , 30±10s) 试验板的厚度0.8mm 上按上面条件通过两次热风炉。 The specimen shall be subjected to the reflow process under the above condition 2 times. Test board shall be 0.8mm thick. Base material shall be glass epoxy resin. 测定Measurement 常温常湿中放置于1 小时以上测试。 The specimen shall be stored at standard atmospheric conditions for 1 h in prior to the measurement.	Change from an initial value L : within±10%
绝缘抵抗 Insulation resistance	在电极与磁材之间加入直流电压100V。 100V DC shall be applied between the terminal and the core.	100mΩ 以上 100mΩ or more.
耐寒性 Low temperature	在温度-40±3°C中放置500±12 小时后，常温常湿中放置1 小时以上2 小时以内测试。 The specimen shall be stored at a temperature of -40±3°C for 500 ±12h. Then it shall be stabilized under standard atmospheric conditions for 1 h before measurement Measurement shall be made within 1h.	Change from an initial value L : within±10%
耐热性 Dry heat	在温度125±2°C中放置500±12 小时后，常温常湿中放置1 小时以上2 小时以内测试。 The specimen shall be stored at a temperature of 125 ± 2°C for 500± 12h. Then it shall be stabilized under standard atmospheric conditions for 1 h before measurement. Measurement shall be made within 1h.	Change from an initial value L : within±10%

耐湿性 Dump heat	在温度$60\pm 2^{\circ}\text{C}$·湿度90~95%中放置500 ± 12小时后·常温常湿中放置1 小时以上2 小时以内测试。 The specimen shall be stored at a temperature of $60\pm 2^{\circ}\text{C}$ with relative humidity of 90 ~ 95% for $500 \pm 2\text{h}$. Then it shall be stabilized under standard atmospheric conditions for 1 h before measurement. Measurement shall be made within 1h.	Change from an initial value L : within $\pm 10\%$
温度循环 Temperature cycle	以温度-40°C中放置30 分钟·在125°C放置30 分钟·中间转换时间不超过2 分钟为一个循环。完成500 个循环后·常温常湿中放置1小时以上2 小时以内测试。 The specimen shall be subjected to 500 continuous cycles of temperature change of -40°C for 30 min and 125°C for 30 min with the transit period of 2min or less. Then it shall be stabilized under standard atmospheric conditions for 1 h before measurement. Measurement shall be made within 1h.	Change from an initial value L : within $\pm 10\%$

标准状态Standard atmospheric conditions

Unless otherwise specified, the standard range of atmospheric conditions in making measurements and test as follows;

Ambient temperature : 5°C to 35°C , Relative humidity: 45% to 85%, Air pressure: 86kPa to 106kPa

If more strict measurement is required, measurement shall be made within following limits;

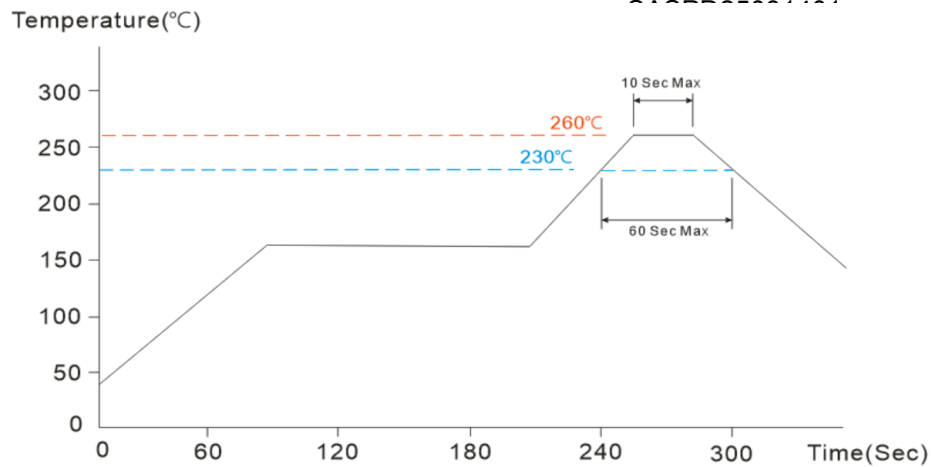
Ambient temperature : $20\pm 2^{\circ}\text{C}$, Relative humidity: $65\pm 5\%$, Air pressure: 86kPa to 106kPa

禁用物质Prohibited Substances

我公司保证我司的产品和生产过程符合“RoHS 规则”·所有产品中使用的材料均是化学物质生产规则中登记的材料。

We confirm that our products and our production process accord with "rule of RoHS". All materials used in this product are registered material under the law concerning the examination and Regulation of Manufacture of Chemical Substances.

⊕ Reflow Soldering Heat Endurance

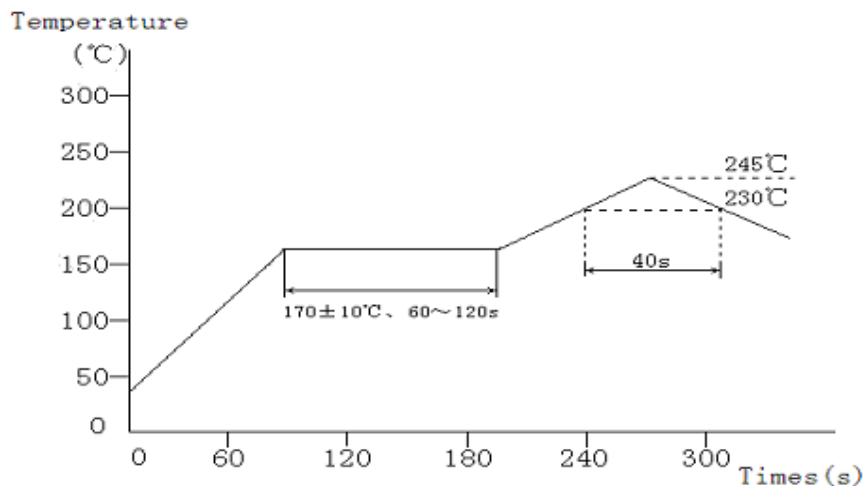


No mechanical and electrical defects are found after testing based on the above profile and keeping under the conditions of room temperature and humidity for 2 hours.

Twice reflow test is acceptable with the test interval remaining 1 hour under the normal conditions.

The reflow test profile may vary with the testing instruments.

⊕ Recommended Reflow Conditions

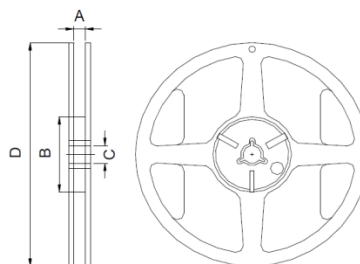
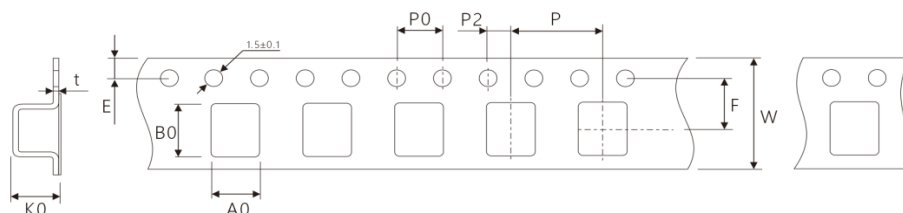


The recommended reflow profile is based on the testing instruments used. Solder ability will depend on the testing equipments, reflow conditions, testing method, etc. So it is necessary to make a confirmation of them when the reflow conditions are set up.

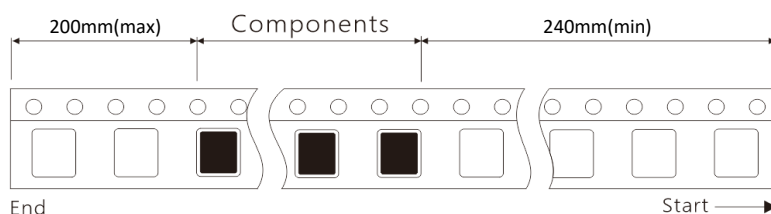
However halogen lamp shall be used, side heat will be beyond range of resistance heat, so we can't recommend it.

⊕Reel Dimension(m/m)

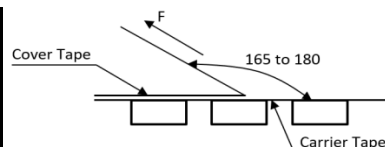
Item	A	B	C	D
SPD6028	16.5±1	100±1	13±1	330±1
SPD7032	16.5±1	100±1	20.4±1	330±1
SPD7045	16.5±1	100±1	20.4±1	330±1
SPD7055	16.5±1	100±1	20.4±1	330±1
SPD10145	24.5±1	80±1	20.4±1	330±1
SPD10165	24.5±1	80±1	20.4±1	330±1
SPD12575	24.5±1	80±1	20.4±1	330±1


⊕Taping Dimension(m/m)


Item	W	Ao	Bo	Ko	E	F	P	P0	P2	t
SPD6028	16.0±0.3	6.3±0.1	6.3±0.1	3.1±0.1	1.75±0.1	7.5±0.1	12.0±0.1	4.0±0.1	2.0±0.1	0.4±0.05
SPD7032	16.0±0.3	7.4±0.1	7.4±0.1	3.6±0.1	1.75±0.1	5.5±0.1	12.0±0.1	4.0±0.1	2.0±0.1	0.35±0.05
SPD7045	16.0±0.3	7.4±0.1	7.4±0.1	4.9±0.1	1.75±0.1	5.5±0.1	12.0±0.1	4.0±0.1	2.0±0.1	0.35±0.05
SPD7055	16.0±0.3	7.6±0.1	7.6±0.1	6.2±0.1	1.75±0.1	5.5±0.1	12.0±0.1	4.0±0.1	2.0±0.1	0.35±0.05
SPD10145	24.0±0.3	10.3±0.1	10.3±0.1	5±0.1	1.75±0.1	5.5±0.1	16.0±0.1	4.0±0.1	2.0±0.1	0.4±0.05
SPD10165	24.0±0.3	10.3±0.1	10.3±0.1	5±0.1	1.75±0.1	5.5±0.1	16.0±0.1	4.0±0.1	2.0±0.1	0.4±0.05
SPD12575	24.0±0.3	13±0.1	13±0.1	8.2±0.1	1.75±0.1	5.5±0.1	16.0±0.1	4.0±0.1	2.0±0.1	0.35±0.05

⊕Taping method

⊕Taping Off Force

in the arrow direction under the following conditio			
Room Temp	Room Humidity	Room atrn	Teaming Speed
(°C)	(%)	(hPa)	(mm/min)
5~35	45~85	860~1060	300


⊕ Packaging Carton

Item	Reel Packing	Inner Box Packing	Carton Packing
SPD6028	1,000 PCS / Reel	2,000 PCS / Box	4,000 PCS / Box
SPD7032	1,000 PCS / Reel	3,000 PCS / Box	6,000 PCS / Box
SPD7045	1000 PCS / Reel	2,000 PCS / Box	4,000 PCS / Box
SPD7055	1,000 PCS / Reel	1,000 PCS / Box	5,000 PCS / Box
SPD10145	600 PCS / Reel	1,200 PCS / Box	2,400 PCS / Box
SPD10165	500 PCS / Reel	1,000 PCS / Box	2,000 PCS / Box
SPD12575	500 PCS / Reel	1,000 PCS / Box	2,000 PCS / Box

